

H9122 (47~862MHz)

FTTH CATV Optical Receiver

PRODUCT DESCRIPTION

Guangtai H9122, the operating bandwidth of 47~862MHz, Products with high sensitivity optical receiver tube and special low noise matching circuit, Whether used in analog television or digital television, have high reception sensitivity and excellent intermodulation distortion index. is a low power, high performance, cost-effective triple play, FTTH CATV optical receiver.

H9122 for Analog TV, in Pin $\geq -10\text{dBm}$ when, $V_o \geq 69\text{dB}\mu\text{V}$, $\text{CNR} \geq 45\text{dB}$.

H9122 for Digital TV, in Pin $\geq -15\text{dBm}$ when, $V_o \geq 62.7\text{dB}\mu\text{V}$, $\text{MER} \geq 36.8\text{dB}$.

H9122 for Digital TV, in Pin $\geq -20\text{dBm}$ when, $V_o \geq 53.1\text{dB}\mu\text{V}$, $\text{MER} \geq 29.4\text{dB}$.

Triple play, fiber to the home, using the H9122 can save a lot of optical fiber amplifier power resources. For operators, can greatly reduce the cost of building the network.

H9122 optical port mode of the following three selection:

H9122 :operating wavelength 1260~1620nm. A - Type

H9122/WD: Built-in CWDM, suitable for single-fiber triple wavelength system, CATV operating wavelength 1550nm, pass wavelength 1310/1490nm, can conveniently connect the ONU of EPON, GPON. B - Type & C - Type

H9122/WF: built-in 1310/1490nm filter, suitable for single-fiber triple wavelength system, CATV operating wavelength 1550nm. A - Type



PRODUCT FEATURES

- ▶ Extra-low noise(3.8% modulate, -10dBm receive, $\text{CNR} \geq 45\text{dB}$)
- ▶ Wide dynamic receiving optical power range: within Pin ≥ -15 , $\text{MER} \geq 36.8\text{dB}$
- ▶ Applicable GPON, EPON, compatible with any FTTx PON technology
- ▶ Can save a large number of optical power resource, greatly reduce the network configuration cost
- ▶ In the range of 47~862MHz, all have good flatness ($\text{FL} \leq \pm 0.75\text{dB}$)
- ▶ Metal shell, supply safeguards to opto-electrical sensing device
- ▶ High output level can supply for many users
- ▶ Low power consumption, high cost performance

MAIN APPLICATION


- ▶ CATV FTTH
- ▶ Integration of three networks
- ▶ FTTH PON

STATUS INDICATION

- ▶ Red : $> +2\text{dBm}$
- ▶ Green : $+2 \sim -16\text{dBm}$
- ▶ Orange : $-16 \sim -20\text{dBm}$
- ▶ Red : $< -20\text{dBm}$

Note: Users can set the order request

H9122/WD
In the triple play, FTTH,
Triplexer Wave System

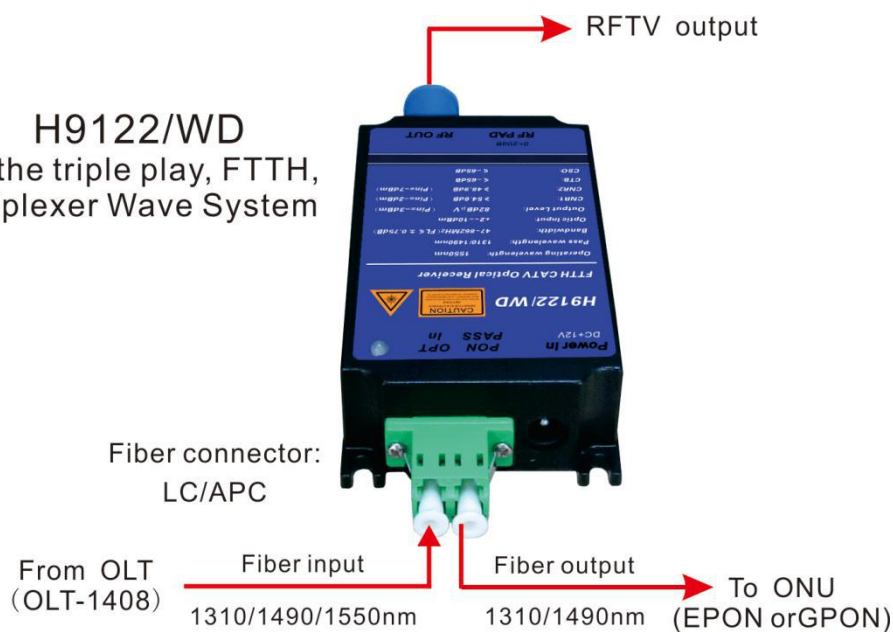
[illegible]

TECHNICAL INDEX

Performance			Index	Supplement
Optic feature	CATV work wavelength	(nm)	1260~1620	H9122(A-Type)
			1540~1563	H9122/WF, H9122/WD(A&B&C Type)
	Pass wavelength	(nm)	1310, 1490	H9122/WD(B&C Type)
	Channel Isolation	(dB)	≥40	1550nm & 1490nm
	Responsivity	(A/W)	≥0.85	1310nm
			≥0.9	1550nm
	Receiving power	(dB)	+2~-10	Analog TV(CNR>45dB)
			+2~-20	Digital TV(MER>29dB)
	Optical return loss	(dB)	≥55	
	Optical fiber connector		SC/APC	H9122, H9122/WF
			LC/APC	H9122/WD
RF feature	Work bandwidth	(MHz)	47~862	
	Flatness	(dB)	≤±0.75	47 ~ 862MHz
	Output level	(dBμV)	>82	Analog TV(Pin=-3dBm)
			>82	Digital TV(Pin=-5dBm)
	Output level adjust	(dB)	0~18	MGC
	Return loss	(dB)	≥14	47 ~ 862MHz
	Output impedance	(Ω)	75	
	Output port number		1	
Analog TV Link feature	RF tie-in		F-Female	
	Test channel	(CH)	59CH(PAL-D)	
	OMI	(%)	3.8	
	CNR1	(dB)	54.6	Pin=-2dBm
	CNR2	(dB)	45.1	Pin=-10dBm
	CTB	(dB)	≤-65	Pin:0~-10dBm
Digital TV Link feature	CSO	(dB)	≤-65	Pin:0~-10dBm
	OMI	(%)	4.3	
	MER	(dB)	≥36	Pin=-15.0dBm
			≥31	Pin=-19.0dBm


	BER	(dB)	<1.0E-9	Pin :+2.0~-20dBm
General feature	Power supply	(V)	DC+12V	±1.0V
	Power Consume	(W)	≤3	+12VDC, 210mA
	Work temp	(°C)	-20 ~ +55	
	Storage temp	(°C)	-40 ~ 85	
	Work relative temp	(%)	5 ~ 95	
	Size(W)×(D)×(H)	(mm)	38×80×22	A-Type
			50×88×22	B-Type
			59.5×98×24	C-Type

FLATNESS

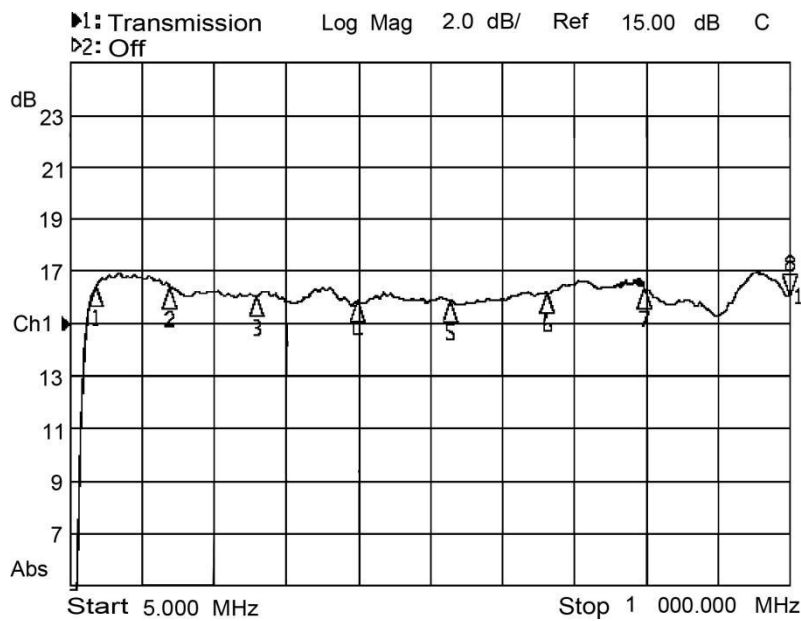

1: Mkr	(MHz)	dB
1:	42.00	16.44
2:	144.00	16.39
3:	262.70	16.08
4:	402.50	15.77
5:	531.06	15.86
6:	665.08	16.16
7:	798.81	16.39
8>	1000.00	16.07

CNR, MER DEGRADATION TABLE

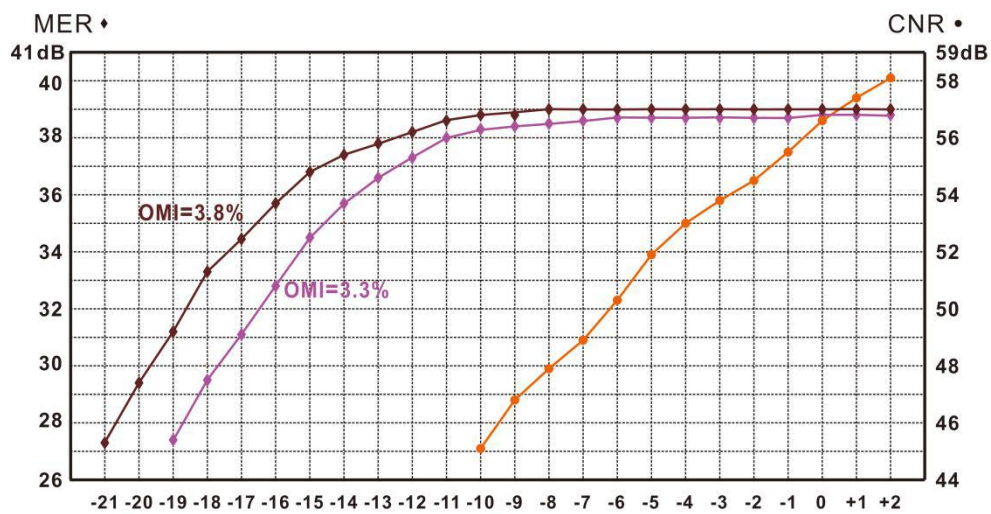

Note: 1. CNR Test conditions: 59CH PAL-D, OMI = 3.8%

2. MER test conditions: The Original Signal : MER = 39.0dB, BER < 1.0E-9,

Test Frequency : 47 ~ 862MHz Full Channel, (The Curve is: 858. 00MHz) .

Red curve: OMI=3.8%

Brown curve: OMI=4.3%

3. Digital television Receiving Low Light, appropriate to increase the system modulation (OMI), can greatly improve the MER degradation.

ANALOG TV TEST DATA

(PAL-D59CH, OMI = 3.8%)

Pin(dBm)	+2	-1	0	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10
Vo(dBμV)	93.3	91.2	89.3	87.3	85.1	83.4	81.0	79.5	77.6	75.0	73.1	71.5	69.1
PAD(dB)	0	0	0	0	0	0	0	0	0	0	0	0	0
CNR(dB)	58.1	57.3	56.7	55.4	54.6	53.8	53.0	51.9	50.4	50.1	47.9	46.8	45.1
CTB(dB)	65.7	70.0	70.9	72.1	71.1	75.0	74.0	72.0	70.6	69.3	68.5	67.6	65.7
CSO(dB)	67.2	69.6	70.9	70.7	70.3	72.8	72.0	68.6	65.4	67.4	69.8	65.3	66.7

DIGITAL TV TEST DATA (PIN=+2.0DBM ~ -20.0DBM)

Pin (dBm)	Vo (dBm)	MER	BER	
			POST	PRE
+2.0	97	39.0	<1.0E-9	<1.0E-9
+1.0	94.9	39.0	<1.0E-9	<1.0E-9
+0.0	92.7	39.0	<1.0E-9	<1.0E-9
-1.0	90.1	39.0	<1.0E-9	<1.0E-9
-2.0	88.8	39.0	<1.0E-9	<1.0E-9
-3.0	86.8	39.0	<1.0E-9	<1.0E-9
-4.0	84.6	39.0	<1.0E-9	<1.0E-9
-5.0	82.2	39.0	<1.0E-9	<1.0E-9
-6.0	80.2	39.0	<1.0E-9	<1.0E-9
-7.0	78.9	39.0	<1.0E-9	<1.0E-9
-8.0	76.0	39.0	<1.0E-9	<1.0E-9
-9.0	75.1	38.9	<1.0E-9	<1.0E-9

Pin (dBm)	Vo (dBm)	MER	BER	
			POST	PRE
-10.0	72.9	38.8	<1.0E-9	<1.0E-9
-11.0	70.5	38.6	<1.0E-9	<1.0E-9
-12	68.4	37.8	<1.0E-9	<1.0E-9
-13	67.2	37.6	<1.0E-9	<1.0E-9
-14	64.9	37.4	<1.0E-9	<1.0E-9
-15	62.7	36.8	<1.0E-9	<1.0E-9
-16	60.7	35.7	<1.0E-9	<1.0E-9
-17	59.1	34.5	<1.0E-9	<1.0E-9
-18	57.1	33.3	<1.0E-9	<1.0E-9
-19	55.1	31.2	<1.0E-9	<1.0E-9
-20	53.1	29.4	<1.0E-9	2.2E-9

PRODUCT SERIES

Model	Input wavelength	CATV operating wavelength	Data pass wavelength	Fiber connector	Form
H9122	1310 or 1550nm	1260~1620nm	-	SC/APC	A - Type
H9122/WF	1310, 1490 / 1550nm	1540~1563nm	-	SC/APC	
H9122/WD	1310, 1490 / 1550nm	1540~1563nm	1310/1490nm	LC/APC	B - Type & C - Type

MODEL EXPLANATION

FTTx Receiver		Work bandwidth		Number of RF output		Output level (Pin=-3dBm)		CWDM		Exterior		Optical connector	
H	FTTH	9	47~862MHz	1	1ports	22	22dBmV(82dBμV)	NC	Without	A	38×80×22 (mm)	LA	LC/APC
P	FTTP							WD	Build-in CWDM			LP	LC/UPC
B	FTTB							WF	Build-in Filter	B	50×88×22 (mm)	SA	SC/APC
										C	59.5×98×24 (mm)	SP	SC/UPC