

HA5800E (5RU)

FTTx PON Optical Amplifier (1540~1563nm)

PRODUCT DESCRIPTION

HA5800E (5RU) series is a low noise, high performance, FTTP high power, multi-ports optical amplifier with gain spectrum band within 1540~1563nm. Each output port for optical amplifier has built-in well-performed CWDM. Every external up-link optical port of optical amplifier can connect with OLT PON port very conveniently. Each 1550nm (CATV)'s output optical port multiplex 1310/1490nm's data stream, in order to reduce the quantity of the component and improve the index and reliability of the system.

HA5800E optical amplifier can be compatible with any FTTx PON Technology. It offers a flexible and low-cost solution for three-network integration and Fiber to the Home.

HA5800E has extremely low noise figure, the entire unit adopts twin-stage amplification, and the pre-amplifier adopts low noise EDFA, output cascade adopts high power EYDFA. When input optical power $P_{in}=0\text{dBm}$, the noise figure of unit is $\leq 5.5\text{dB}$ Unlike other kind of product which need high optical power input to maintain lower noise figure.

HA5800E optical amplifier adopts the world's top class pump laser and active optical fiber. Perfect APC, ACC and ATC control, excellent design in the ventilation and heat-dissipation ensure the long life and high reliable work of pump laser. RS232 and RJ45 offer serial commutation and SNMP network management port.

HA5800E LCD at the front panel offers the work index of all equipment and warning alarms. The laser will switch off automatically if optical power is missing, which offers security protection for the laser. All the optical port of optical amplifier can be installed in the front panel or back panel.

HA5800E optional two-way optical input (built-in 2x1 optical switch), can be used for self-healing ring network or redundant backup network.

HA5800E with carrier-class reliability and network security management, high quality, high reliability and excellent cost performance and is ideal for system integrators and system operator.

HA5800E: 19" 5RU rack, The total maximum output power of 49dBm (80000mW), use LC/APC, optional output port up to 256 optional port, 256 pcs uplink optical ports.



PRODUCT FEATURE

- ▶ 1540~1563nm operating bandwidth for optical amplifier
- ▶ Each output optical port is with built-in high performance CWDM, single fiber three wavelengths, which can save optical fiber resources largely.
- ▶ Simplified machine-room links, improve the system reliability, and largely reduce the network maintenance cost
- ▶ Can compatible with any FTTx PON technology: EPON/GEPON, GPON
- ▶ Total output power optional 25000~80000mW (44~49dBm)
- ▶ 5U rack up to optional 256 up-link ports, which used in OLT; And 256 1550nm output optical ports, multiplex the 1310/1490nm data stream.
- ▶ Built-in low noise pre-amplifier, not necessary EDFA cascade, extremely lower the CNR, MER degradation of the system
- ▶ Low noise figure $\leq 5.5\text{dB}$
- ▶ Perfect RS232 ,SNMP
- ▶ Telecom level safety reliability and network management
- ▶ Efficient space, simple and reliable in construction/maintenance
- ▶ Optional dual optical input, built-in 2×1 optical switch
- ▶ Dual power supply optional, 1+1 backup
- ▶ Can reduce the 98% device space usage
- ▶ Can reduce the 85% device purchase cost
- ▶ Can reduce 95% power consumption
- ▶ Industry's best price-performance

MAIN APPLICATION

- ▶ FTTx PON
- ▶ RFoG


TECHNIQUE INDEX

| Performance | | | Index | | | Supplement |
|-----------------|--|-------|-----------|------|------|----------------|
| | | | Min. | Typ. | Max. | |
| Optical feature | CATV operation wavelength | (nm) | 1540 | | 1563 | CATV |
| | OLT pass wavelength | (nm) | 1310/1490 | | | |
| | CATV pass wavelength loss | (dB) | | | 0.8 | 1550nm |
| | OLT pass wavelength loss | (dB) | | | 0.8 | 1310/1490nm |
| | CATV & OLT isolation | (dB) | 40 | | | |
| | Number of uplink optical ports (for OLT) | (pcs) | | | 256 | |
| | CATV input power (Pi) | (dBm) | -10 | | +10 | |
| | Total output power ¹⁾ | (dBm) | | | 49 | |
| | Number of output ports | (pcs) | | | 256 | |
| | Each port output power | (dBm) | 0 | | 22 | |
| | Difference of each output power | (dB) | -0.5 | | +0.5 | |
| | Output optical power monitoring | (dB) | | -20 | | Optional |
| | Output power adjustable range | (dBm) | -6 | | 0 | Optional |
| | Noise figure | (dB) | | 4.5 | 5.5 | HA5800E-1x □□□ |
| | | | | 5.0 | 6.0 | HA5800E-2x □□□ |
| | Switch time | (ms) | | | 8.0 | HA5800E-2x □□□ |
| | Polarization dependence loss | (dB) | | | 0.3 | |
| | Polarization dependence gain | (dB) | | | 0.4 | |
| | Polarization mode dispersion | (ps) | | | 0.3 | |
| | Input/output isolation | (dB) | 30 | | | |
| | Pump power leakage | (dBm) | | | -30 | |
| | Echo loss | (dB) | 55 | | | APC |


| | | | | | | |
|-----------------|------------------------------|------|--------------|--|-----|--------------|
| General feature | Network management interface | | RJ45 | | | SNMP |
| | Serial interface | | RS232 | | | |
| | Power supply | (V) | 90 | | 265 | 220VAC |
| | | | 30 | | 72 | -48VDC |
| | Power consume | (W) | | | 289 | |
| | Operation temp. | (°C) | -5 | | 65 | |
| | Storage temp. | (°C) | -40 | | 80 | |
| | Relative humidity | (%) | 5 | | 95 | |
| | Size (W)×(D)×(H) | (") | 19×14.7×8.75 | | | HA5800E (5U) |

OPTIC/ELECTRICAL SCHEMA

HA5800E-1x □□□ (conventional)

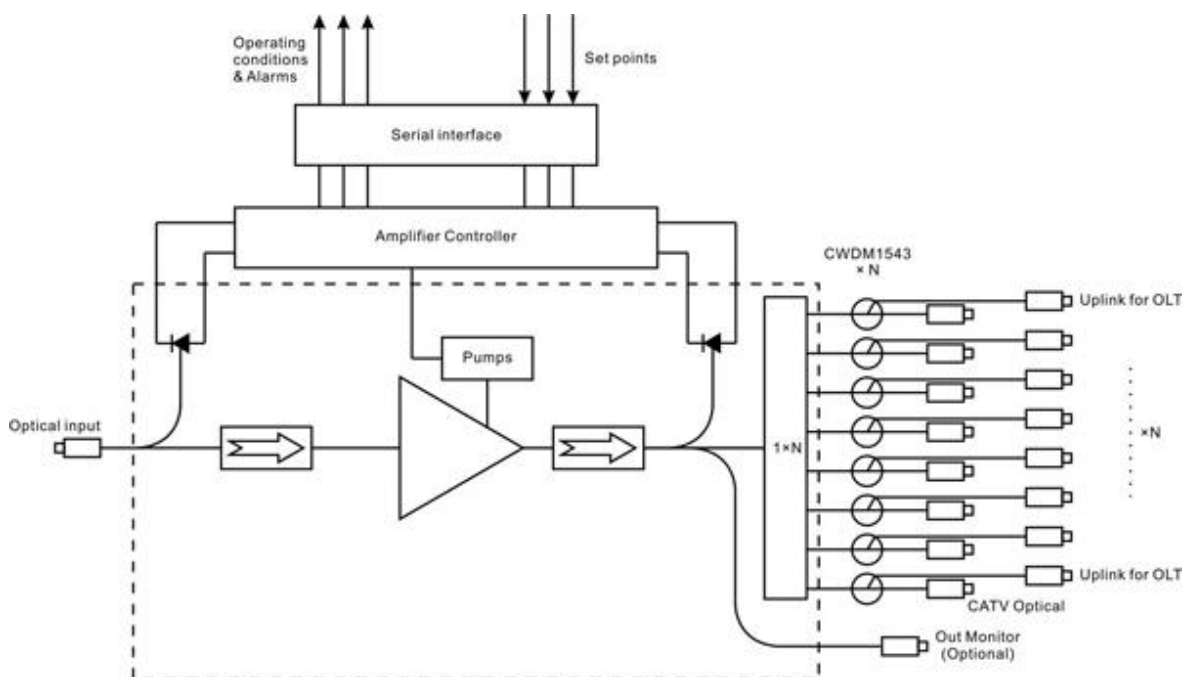

HA5800E-2x □□□ (Built-in Optical Switch)

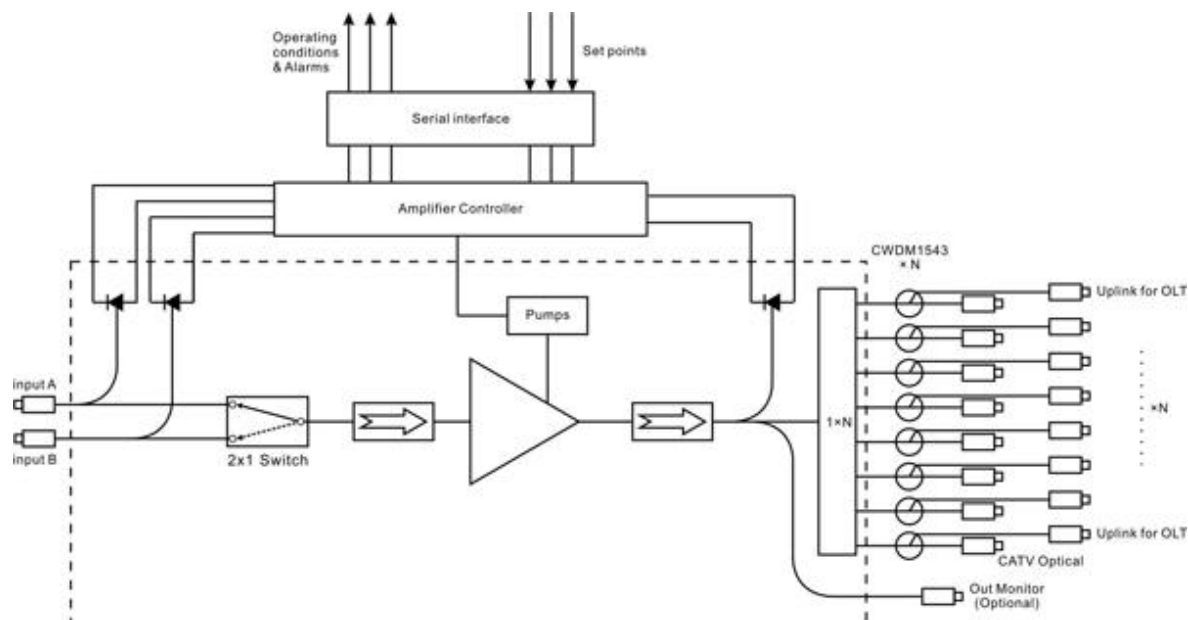

PRODUCT SERIES

| Model number | Total output power | Number of output port | Each port output power | Connector |
|---------------|--------------------|-----------------------|------------------------|---------------|
| HA5844E-1×256 | 44dBm(25000mW) | 256 | 15.5 | LC/APC |
| HA5844E-2×256 | | | | |
| HA5845E-1×256 | 45dBm(32000nW) | 256 | 16.5 | LC/APC |
| HA5845E-2×256 | | | | |
| HA5846E-1×128 | 46dBm(40000mW) | 128 | 21.0 | SC/APC、LC/APC |
| HA5846E-2×128 | | | | |
| HA5846E-1×256 | | 256 | 17.5 | LC/APC |
| HA5846E-2×256 | | | | |
| HA5847E-1×128 | 47dBm(50000mW) | 128 | 22.0 | SC/APC、LC/APC |
| HA5847E-2×128 | | | | |
| HA5847E-1×256 | | 256 | 18.5 | LC/APC |
| HA5847E-2×256 | | | | |
| HA5848E-1×256 | 48dBm(64000mW) | 256 | 19.5 | LC/APC |
| HA5848E-2×256 | | | | |
| HA5849E-1×256 | 49dBm(80000mW) | 256 | 20.5 | SC/APC,LC/UPC |
| HA5849E-2×256 | | | | |

HA 5 8 □□ E - □ □ × □□□ - □□ - □ / □□ - M□□

| Product series | | Operating Wavelength | | Product type | | Total Output Power(dBm) | | Exterior | | Function | | Enter the port number | | The output port number | | Connector | | Power mode | | Power supply | | Output Optical port Monitoring | |
|----------------------------------|---|----------------------|---|---------------|----|-------------------------|---|----------|---|--------------------|---|-------------------------------|-----|------------------------|-----|------------------|----|----------------|----|-------------------------------------|----|--------------------------------|----|
| Amplifier of communication class | 5 | 1540~1563nm | 8 | FTTx PON EDFA | 44 | 44 | E | 5RU | O | Without | 1 | Single input (Without Switch) | 128 | 128 ports | LA | LC/APC | S | Single PS | 22 | 220VAC | 00 | Without | |
| | | | | | 45 | 45 | A | 1RU | P | Optical power adj. | | | | | 256 | 256 ports | LP | LC/UPC | D | Dual PS | | | 48 |
| | | | | | 46 | 46 | B | 2RU | | | 2 | Dual input (With Switch) | SA | SC/APC | P | Dual PS Hot plug | 42 | -48VDC &220VAC | MO | With output optical port monitoring | | | |
| | | | | | 47 | 47 | C | 3RU | | | | | SP | SC/UPC | | | | | | | | | |
| | | | | | 48 | 48 | | | | | | | | | | | | | | | | | |
| | | | | | 49 | 49 | | | | | | | | | | | | | | | | | |