

WD1615/C, WD1516/L

C-Band / L-Band MWDWM

PRODUCT DESCRIPTION

WD1615/C, WD1516/L WDM is based on mature thin film filtering tech, with wide bandwidth, flatness, low insertion loss and high isolation. It is mainly applied to EDFA and DWDM network to achieve the combination and separation of C-Band and L-Band.

WD1615/C: C-Band Pass.

WD1516/L: L-Band Pass.

PRODUCT FEATURE

- ▶ Low insertion loss
- ▶ High channel isolation
- ▶ High pass band flatness
- ▶ High stability and reliability
- ▶ Optical link without epoxy glue

MAIN APPLICATION

- ▶ Optical fiber amplifier
- ▶ System monitor
- ▶ Optical fiber instrument
- ▶ Laboratory R&D




TECHNIQUE INDEX


| Performance | | Index | | | Supplement |
|---------------------------------------|----------------------|-------------------------------|------|------|------------|
| | | Min. | Typ. | Max. | |
| Transmission channel wavelength range | (nm) | 1500 | | 1564 | WD1615/C |
| | | 1574 | | 1640 | WD1516/L |
| Reflection channel wavelength range | (nm) | 1574 | | 1640 | WD1615/C |
| | | 1500 | | 1564 | WD1516/L |
| Insertion loss | Transmission channel | | | 0.6 | |
| | Reflection channel | | | 0.4 | |
| Isolation | Transmission channel | 30 | | | |
| | Reflection channel | 13 | | | |
| Pass band ripple | (dB) | | | 0.3 | |
| Directivity | (dB) | 50 | | | |
| Return loss | (dB) | 50 | | | |
| Polarization mode dispersion | (ps) | | | 0.05 | |
| Polarization dependence loss | (dB) | | | 0.1 | |
| Power handling | (mW) | | | 500 | |
| Operating temp. | (°C) | -10 | | +70 | |
| Storage temp. | (°C) | -40 | | +85 | |
| Fiber type | | SMF-28e with 900μm loose tube | | | |
| Optical connector | | SC/APC | | | |
| External dimension | (mm) | Φ5.5×34 | | | S |
| | | 89×51×8 | | | M |

EXTERIOR DIMENSION

S exterior

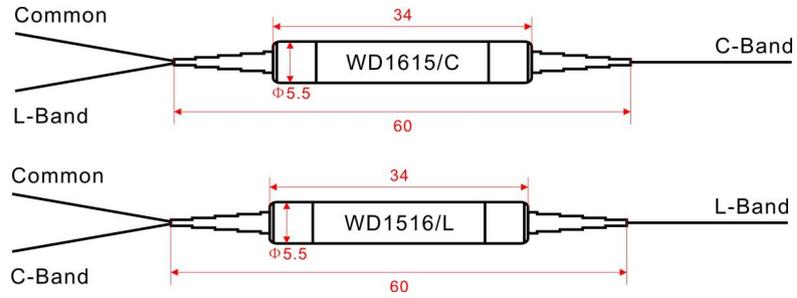

M exterior

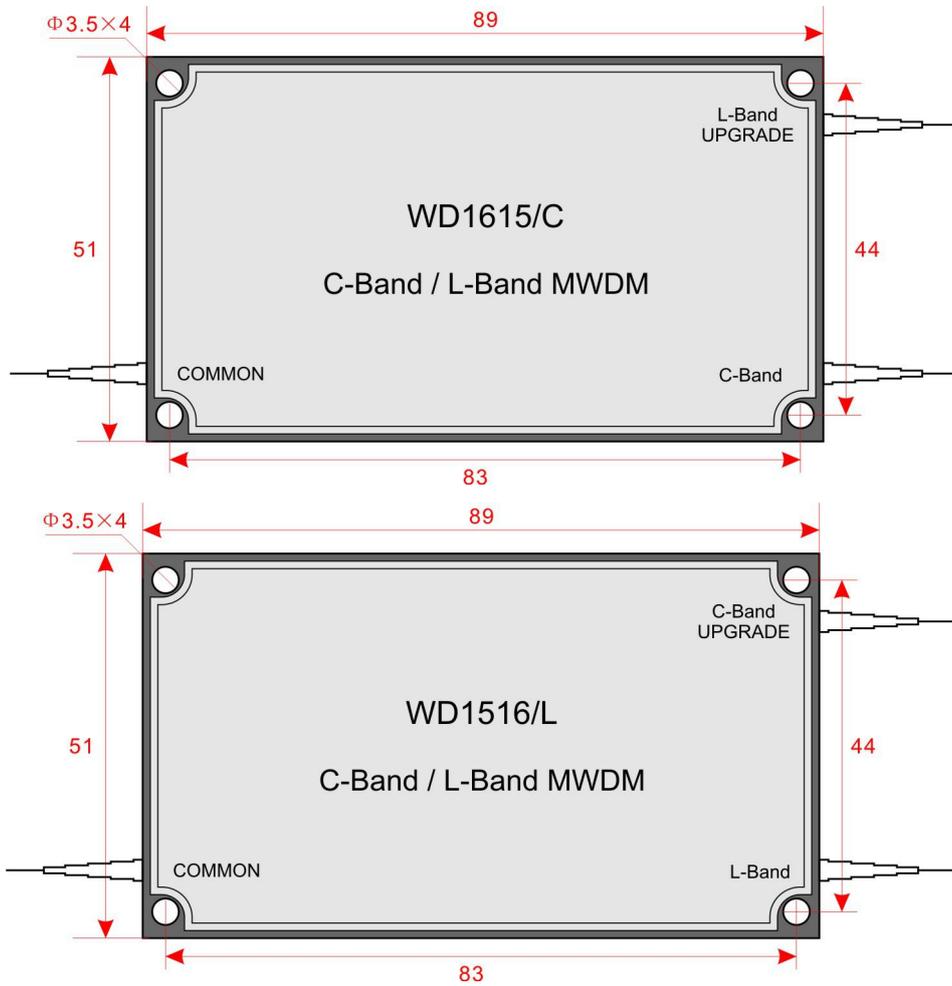

PRODUCT SERIES

| Model number | Transmission band | Reflection band | Exterior (mm) | Connector | Supplement |
|---------------|-------------------|-----------------|---------------|-----------|-----------------|
| WD1615/C-S-00 | C-Band | L-Band | Φ5.5×34 | None | |
| WD1615/C-M-SA | | | 89×51×8 | SC/APC | FC/APC optional |
| WD1516/L-S-00 | L-Band | C-Band | Φ5.5×34 | None | |
| WD1516/L-M-SA | | | 89×51×8 | SC/APC | FC/APC optional |

MODEL EXPLANATION

WD 16 15 / C - □ - S A

| Product series | | Reflection wavelength | | Transmission wavelength | | Transmission wavelength code | | Exterior | | Connector | |
|----------------|------------------|-----------------------|--------|-------------------------|--------|------------------------------|--------|----------|----------------------------|-----------|--------|
| WD | Band multiplexer | 16 | L-Band | 15 | C-Band | C | C-Band | S | Single component Φ5.5×34mm | 00 | None |
| | | 15 | C-Band | 16 | L-Band | L | L-Band | M | Module 89×51×8mm | SA | SC/APC |
| | | | | | | | | | | SP | SC/UPC |
| | | | | | | | | | | FA | FC/APC |
| | | | | | | | | | | FP | FC/UPC |
| | | | | | | | | | | LA | LC/APC |
| | | | | | | | | | | LP | LC/UPC |

WD 15 16 / L - □ - S A

| Product series | | Reflection wavelength | | Transmission wavelength | | Transmission wavelength code | | Exterior | | Connector | |
|----------------|------------------|-----------------------|--------|-------------------------|--------|------------------------------|--------|----------|----------------------------|-----------|--------|
| WD | Band multiplexer | 15 | C-Band | 16 | L-Band | C | C-Band | S | Single component Φ5.5×34mm | 00 | None |
| | | 16 | L-Band | 15 | C-Band | L | L-Band | M | Module 89×51×8mm | SA | SC/APC |
| | | | | | | | | | | SP | SC/UPC |
| | | | | | | | | | | FA | FC/APC |
| | | | | | | | | | | FP | FC/UPC |
| | | | | | | | | | | LA | LC/APC |
| | | | | | | | | | | LP | LC/UPC |