

# WPA4300-FM02 (70×90×15mm)

## C-Band DWDM Full Function Pre EDFA Module

### PRODUCT DESCRIPTION

WPA4300-FM02 series with 70 × 90 × 15mm MSA compact package, is a digital control circuit with DWDM full function preamplifier module. Products using the most excellent optical performance, the most advanced electronic control technology and comprehensive software features, has a wide operating wavelength range, low noise, excellent gain flatness characteristics and transient characteristics. Suitable for C-Band 44 or 88 waves DWDM system applications.

WPA4300-FM02 has two kinds of function versions are available:

1. Standard version: provides a fixed gain control mode (FGA), the pump current control mode (ACC)
2. Enhanced version: In addition to the standard version with the control functions, increasing the variable gain control mode (VGA, AGC), Variable output power control mode (VPA, APC).

WPA4300-FM02 enhanced version, for DWDM systems, providing a flexible, high-performance, low-cost networking applications.



### PRODUCT FEATURES

- ▶ With Digital Control Electronics (Full Function )
- ▶ Wide working wavelength: 1529.16~1563.86nm
- ▶ Accord with the communication technology requirements of 44 channels DWDM system
- ▶ Excellent gain flatness feature (GF<1.0dB)
- ▶ Excellent Transient feature
- ▶ Low noise figure.
- ▶ Standard RS232 communication interface.
- ▶ MSA compact package (70×90×15mm )
- ▶ Low power consumption, Wide operating temperature range
- ▶ Excellent P/P ratio in area.


### MAIN APPLICATION

- ▶ 44 channels DWDM system
- ▶ Long distance trunk network
- ▶ MAN or access network
- ▶ All kinds of SDH/PDH transmission system
- ▶ FTTx PON


## SOFTWARE FUNCTION MONITORING AND ALARM

Function, Monitoring, Alarm		Standard version	Enhanced version
Functions	In-Service Firmware Upgrades	√	√
	Auto Shut Down	√	√
	Fixed Gain Mode ( FGA )	√	√
	Variable Gain Control Mode ( VGA, AGC )	×	√
	Variable output power control mode ( VPA, APC )	×	√
	Pump Current Control Mode ( ACC )	√	√
	Pump Maximum Working Current limit Protection	√	√
Monitors	Total Input Power	√	√
	Total Output Power	√	√
	Pump Status	√	√
	Chassis Temperature	√	√
Alarms	Loss-of-Signal Alarm	√	√
	Chassis Temperature Alarm	√	√
	Pump Temperature Alarm	√	√
	Pump Bias Alarm	√	√

## OPTO-ELECTRICAL DIAGRAM

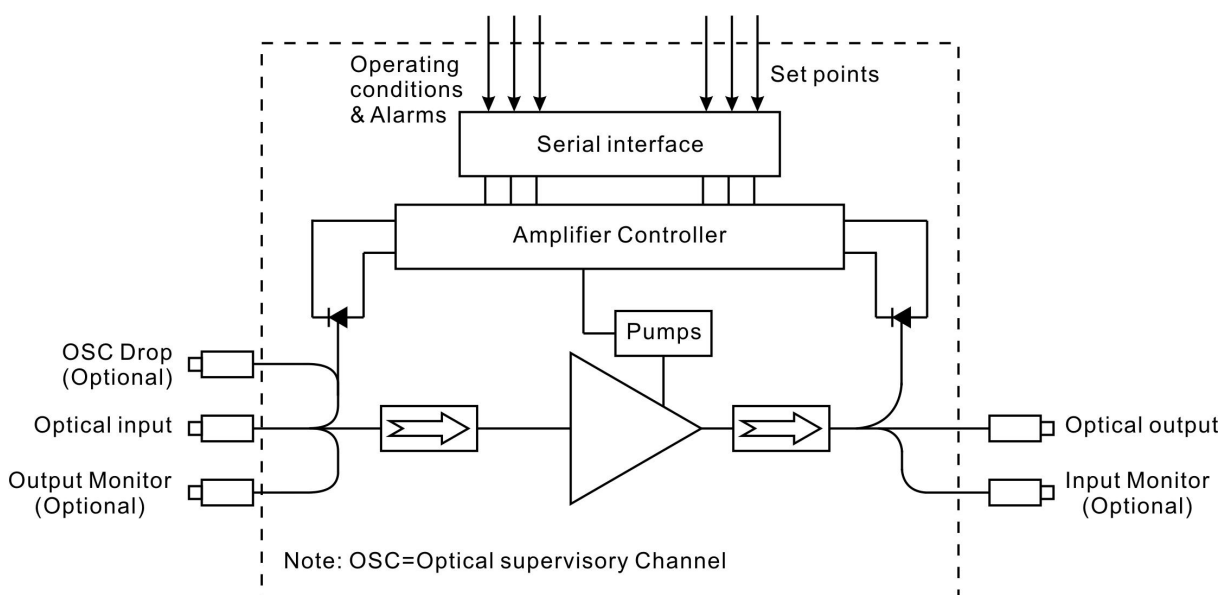

## DIMENSIONS

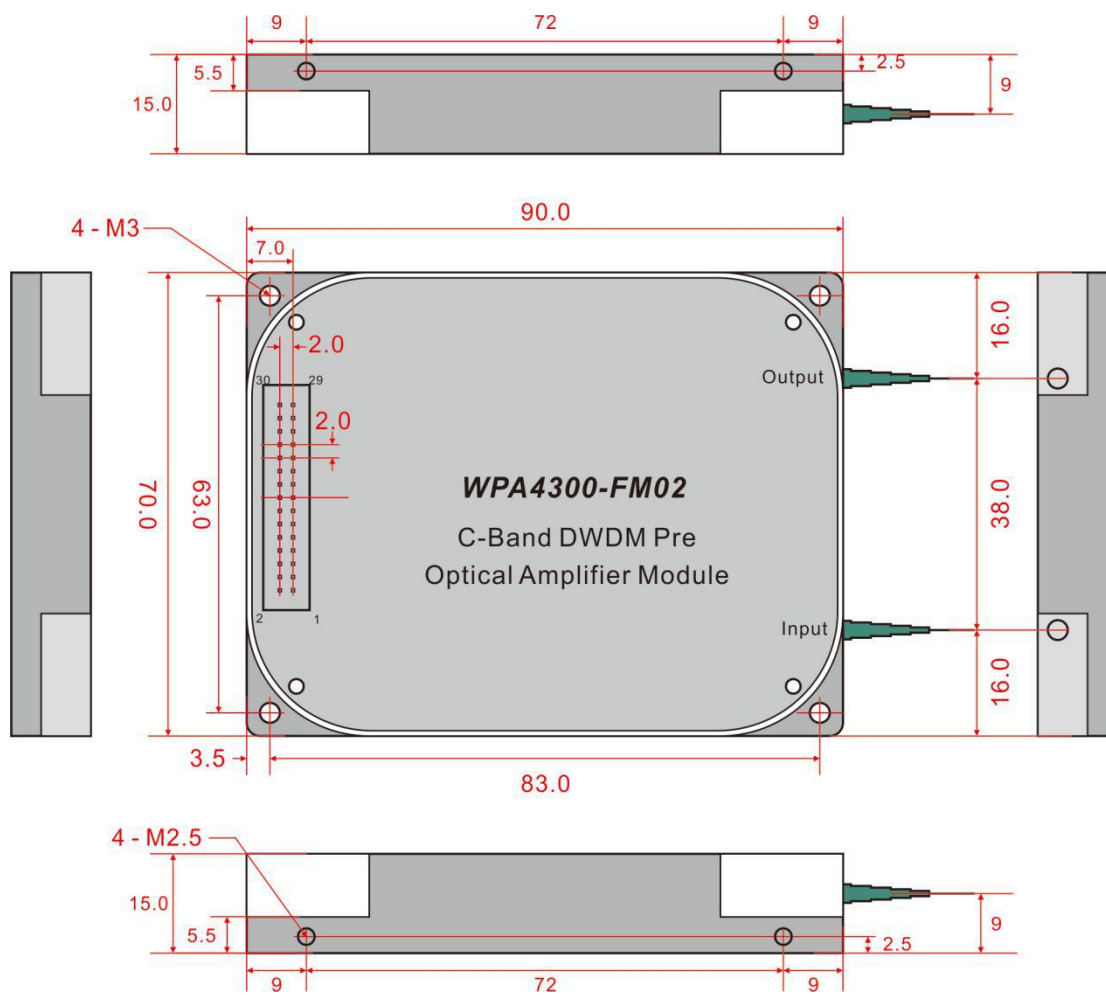

## TECHNICAL INDEX

Performace			Index			Supplement
			Min.	Typ.	Max.	
Optical feature	Working wavelength range ( $\lambda$ )	(nm)	1529.16		1563.86	ITU 88CH
	No. of working channel	(CH)	1	44		
	Input Optical Power (Pi)	(dBm)	-36			
	Saturation output power(Po)	(dBm)		14		Enhanced version
	Variable output power range	(dB)	-6		0	Value of Peak-to-peak
	Signal gain	(dB)	13		36	Enhanced version
	Variable gain range	(dB)	-12		0	Value of Peak-to-peak
	Gain flatness	(dB)		0.7	1.0	
	Noise figure	(dB)		4.5		Max output, max gain
	Polarization dependence Gain (PDG)	(dB)			0.3	
	Polarization mode dispersion (PMD)	(ps)			0.3	
	Polarization dependence loss (PDL)	(dB)			0.3	
	Input/Output optic isolatioin	(dB)	30			
	Pump leakage power	(dB)			-30	
	Echo loss	(dB)	45			UPC
			55			APC
	Optical Supervisory Channel Wavelength	(nm)	1500	1510	1520	
Transient feature	Transient setting time	( $\mu$ s)			700	16dB Add/Drop
	Transient Overshoot	(dB)	-1.5		+1.5	16dB Add/Drop
	Transient gain changes	(dB)	-0.5		+0.5	
General feature	Communication interface		RS232			
	Fiber type		Coming SMF-28™ or equivalent			
	Pigtail buffer diameter	( $\mu$ m)		900		
	Pigtail length	(mm)		1000		
	Power supply	(V)	3.1	3.3	3.5	

Power consumption	(W)		2.0	10	
Working temp.	(°C)	-5		+70	
Storage temp.	(°C)	-40		+85	
Working relative humidity	(%)	+5		+95	
Size (W)×(D)×(H)	(mm)	70×90×15			

## ELECTRICAL 30-PIN ASSIGNMENTS

Pin	Definition	Pin	Definition
1	+3.3V	2	+3.3V
3	NC	4	NC
5	GND	6	GND
7	Upper computer receive	8	Upper computer transmit
9	GND	10	GND
11	NC	12	NC
13	Amplifier switch (enable) input, (low level enable)	14	NC
15	NC	16	NC
17	NC	18	NC
19	NC	20	NC
21	GND	22	GND
23	NC	24	NC
25	GND	26	GND
27	NC	28	NC
29	+3.3V	30	+3.3V

Note: 30-Pin type: HIROSE DF11-30DP-2DSA

Model	Stauration power (dBm)	Signal gain (dB)	Gain flatness (dB)	The Function Version	Monitor optical port mode	OSC Optical port mode
WPA4314-G □□ -FM02	14	14, 17, 20, 22, 24, 27	<1.0	1, FG: Standard version (FGA)	1, M00: Without monitoring	1, O00: Without OSC
WPA4318-G □□ -FM02	18	Optional		2, VG: Enhanced Version (VGA)	2, MO: With output monitoring	2, OD: OSC / Drop

[illegible]